



4PWP 25

Curvas de Rendimiento a 3450 r.p.m.

1 1/4" DESCARGA

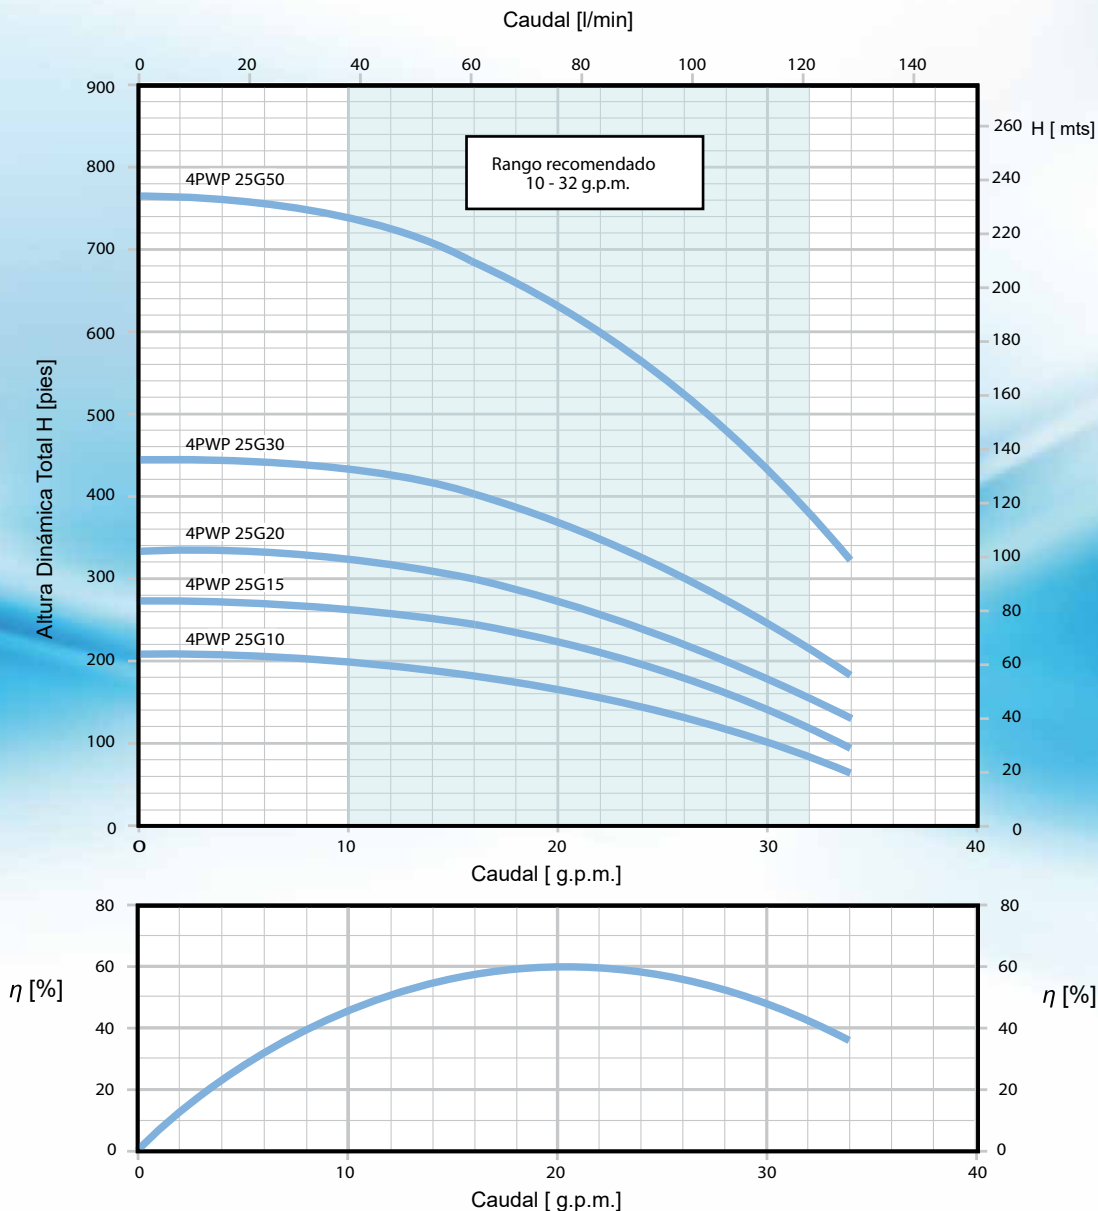


Tabla de Selección

MODELO	ETAPAS	MOTOR		Q = CAUDAL																				HIDRAULICA											
				l/min		30		35		40		50		60		70		80		90		100						120							
		gpm		7.9		9.3		10.6		13.2		15.9		18.5		21.2		23.8		26.5		31.7		ALTURA		PESO									
				KW		HP		H = ALTURA DINAMICA TOTAL EN METROS / PIES																											
				m		ft		m		ft		m		ft		m		ft		m		ft		m		ft		mm		in		kgs		lbs	
4PWP 25G10	7	0.75	1	64	210	63	207	62	203	61	200	59	194	57	187	54	177	50	164	45	148	40	131	27	89	320	12.6	3.1	6.9						
4PWP 25G15	9	1.1	1.5	83	272	82	269	81	266	79	259	77	253	74	243	71	233	66	216	60	197	53	174	38	125	370	14.6	3.5	7.7						
4PWP 25G20	11	1.5	2	101	331	100	328	98	321	96	315	94	308	91	298	86	282	81	266	75	246	67	220	49	161	419	16.5	3.9	8.6						
4PWP 25G30	15	2.2	3	137	449	136	446	134	440	132	433	128	420	124	407	109	358	112	367	103	338	93	305	70	230	518	20.4	4.7	10.4						
4PWP 25G50	26	3.7	5	234	768	232	761	228	748	223	731	218	715	210	689	200	656	188	617	175	574	160	525	122	400	826	32.5	7.1	15.7						

Rango HP: 1 - 5 HP

Rango de Operación Recomendado: 10 - 32 g.p.m.

MODELO	HP	PSI	PROFUNDIDAD DEL AGUA EN PIES / CAUDAL EN GPM																									
			20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	340	380	420	460	500	540	580	620	660	700	
4PWP 25G10	1	0			34	32	30	28	25	21	17	10																
		20	34	31.5	29.8	27.8	24.5	20.7	16.5	11.8	11																	
		30	31.2	29	26.5	23	19	14.5	11	13																		
		40	28.8	26.3	22.8	18.8	14.2	11																				
		50	25.2	22.8	18.5	14	11																					
		60	21	17	12																							
Presión máx.PSI		91	82	74	65	56	48	39	30	22	13	4																
4PWP 25G15	1.5	0					34	32	30	28	26	24	21	17	10													
		20			33	31.5	29.2	27.2	24.5	23	20	16.5	12.5															
		30		33	31	29	27	25	22.5	19	15	12																
		40	31.5	31	28.8	26.8	24.8	22.5	19	15	12																	
		50	30.8	28.8	26.8	24.8	22.5	19	14.7	12																		
		60	28	26	24	21	17	13																				
Presión máx.PSI		118	109	101	92	83	75	66	57	49	40	31	23	14	5													
4PWP 25G20	2	0							33.4	31.7	30	28	26	24	22	19.5	16	3										
		20					32.5	31.5	29.8	27.8	25.8	23.8	21.8	19.2	15.8	10.3												
		30			34	32	30.8	30	27	25	23	21.7	18	10	6													
		40		34	32.2	31.5	30	27	25	23	21	18	7	6														
		50	34	32	31.5	30	27	25	23	21	17	12	6															
		60	31.7	30	28	26	24	22	19.5	16	10.5	2.5																
Presión máx.PSI		143	135	126	117	109	100	91	83	74	65	57	48	40	31	22	14	4										
4PWP 25G30	3	0								34	33	31.8	30.4	29	27.8	26	22.6	19	13									
		20						34	32.4	31.5	30.2	28.8	27.5	25.8	24	22.4	19	13										
		30					33.5	32.2	31.1	29.6	28.6	26.5	25	23.5	21.8	19.8	13											
		40					33	32.2	31.2	29.5	28.5	26.5	25	23.5	21.8	19	17	11										
		50				33.2	32	31	30	28.5	26.5	25	23.5	22	20	16.5	14											
		60		34	33	32	30.4	29	27.8	26	24.3	22.6	21	19	16.4	13	6											
Shut - off PSI		195	186	177	169	160	151	143	134	125	117	108	99	91	82	73	65	47	30	13								
4PWP 25G50	5	0									33	31	29.5	27	25	22	18.7	14.8	7.5									
		20									33.2	31.2	29.7	27.2	25.2	22.2	19	15	7.3									
		30									34	32.5	30.5	28.5	26	23.5	20.8	16.5	12									
		40									34	33	31	29.5	27	25	22	19	15	9.8								
		50									34	32.2	30.5	28.2	26.5	23.8	21	18	13.5									
		60									33.5	31.5	29.5	27.5	25.3	22.5	19	15.5	9									
Presión máx.PSI		332	324	315	306	298	289	267	246	224	202	181	159	137	116	94	72	51	29	8								

* Las pérdidas por fricción en la tubería no han sido consideradas.

Pesos y Dimensiones con Motor Pearl 4"

MODELO	HP	KW	HIDRÁULICA H1				MOTOR 1F - 3 HILOS						MOTOR 1F - 2 HILOS						MOTOR 3F - 3 HILOS					
			ALTURA		PESO		MOTOR H2		BOMBA + MOTOR		MOTOR H2		BOMBA + MOTOR		MOTOR H2		BOMBA + MOTOR							
			plg	cm	lbs	kg	plg	cm	plg	cm	lbs	kg	plg	cm	plg	cm	lbs	kg	plg	cm	plg	cm	lbs	kg
4PWP 25G10	1	0.75	12.6	32.0	6.9	3.1	11.3	28.6	23.9	60.6	26.7	12.1	17.9	45.5	30.5	77.5	27.4	12.4	10.5	26.6	23.1	58.6	24.5	11.1
4PWP 25G15	1.5	1.1	14.6	37.0	7.7	3.5	13.0	33.1	27.6	70.1	32.0	14.5	19.7	50.0	34.3	87.0	32.7	14.8	11.3	28.6	25.8	65.6	27.6	12.5
4PWP 25G20	2	1.5	16.5	41.9	8.6	3.9	15.5	39.3	32.0	81.2	37.3	16.9							13.7	34.8	30.2	76.7	32.9	14.9
4PWP 25G30	3	2.2	20.4	51.8	10.4	4.7	16.3	41.3	36.7	93.1	40.9	18.5							15.5	39.3	35.9	91.1	39.1	17.7
4PWP 25G50	5	3.7	32.5	82.6	15.7	7.1	26.9	68.4	59.4	151.0	74.3	33.6							24.2	61.4	56.7	144.0	66.5	30.1
4PWP 35G10	1	0.75	14.1	35.9	7.5	3.4	11.3	28.6	25.4	64.5	27.4	12.4	17.9	45.5	31.8	80.8	28.1	12.7	10.5	26.6	24.6	62.5	25.2	11.4
4PWP 35G15	1.5	1.1	16.6	42.1	8.8	4.0	13.0	33.1	29.6	75.2	33.2	15.0	19.7	50.0	36.3	92.1	33.8	15.3	11.3	28.6	27.8	70.7	28.7	13.0
4PWP 35G20	2	1.5	19.0	48.3	10.2	4.6	15.5	39.3	34.5	87.6	38.9	17.6							13.7	34.8	32.7	83.1	34.5	15.6
4PWP 35G30	3	2.2	23.9	60.7	12.6	5.7	16.3	41.3	40.2	102.0	43.1	19.5							15.5	39.3	39.4	100.0	41.3	18.7
4PWP 35G50	5	3.7	35.2	89.3	17.9	8.1	26.9	68.4	62.1	157.7	76.5	34.6							24.2	61.4	59.3	150.7	68.7	31.1
4PWP 35G75	7.5	5.5	49.5	125.7	25.6	11.6													26.9	68.4	76.4	194.1	84.4	38.2
4PWP 40G15	1.5	1.1	12.8	32.5	6.9	3.1	13.0	33.1	25.8	65.6	31.2	14.1	19.7	50.0	32.5	82.5	31.8	14.4	11.3	28.6	24.1	61.1	26.7	12.1
4PWP 40G20	2	1.5	14.0	35.6	7.5	3.4	15.5	39.3	29.5	74.9	36.2	16.4							13.7	34.8	27.7	70.4	31.8	14.4
4PWP 40G30	3	2.2	16.5	41.8	8.8	4.0	16.3	41.3	32.7	83.1	39.3	17.8							15.5	39.3	31.9	81.1	37.6	17.0
4PWP 40G50	5	3.7	23.8	60.4	12.6	5.7	26.9	68.4	50.7	128.8	71.2	32.2							24.2	61.4	48.0	121.8	63.4	28.7
4PWP 40G75	7.5	5.5	33.8	85.9	17.2	7.8													26.9	68.4	60.7	154.3	76.0	34.4
4PWP 55G15	1.5	1.1	17.0	43.3	9.5	4.3	13.0	33.1	30.1	76.4	33.8	15.3	19.7	50.0	36.7	93.3	34.5	15.6	11.3	28.6	28.3	71.9	29.4	13.3
4PWP 55G20	2	1.5	21.1	53.7	11.7	5.3	15.5	39.3	36.6	93.0	40.4	18.3							13.7	34.8	34.8	88.5	36.0	16.3
4PWP 55G30	3	2.2	25.2	64.1	13.7	6.2	16.3	41.3	41.5	105.4	44.2	20.0							15.5	39.3	40.7	103.4	42.4	19.2
4PWP 55G50	5	3.7	37.5	95.3	19.9	9.0	26.9	68.4	64.4	163.7	78.5	35.5							24.2	61.4	61.7	156.7	70.7	32.0
4PWP 55G75	7.5	5.5	53.0	134.5	27.2	12.3													26.9	68.4	79.9	202.9	86.0	38.9
4PWP 60G15	1.5	1.1	14.9	37.8	8.6	3.9	13.0	33.1	27.9	70.9	32.9	14.9	19.7	50.0	34.6	87.8	33.6	15.2	11.3	28.6	26.1	66.4	28.5	12.9
4PWP 60G20	2	1.5	16.9	43.0	9.7	4.4	15.5	39.3	32.4	82.3	38.5	17.4							13.7	34.8	30.6	77.8	34.0	15.4
4PWP 60G30	3	2.2	21.0	53.4	11.7	5.3	16.3	41.3	37.3	94.7	42.2	19.1							15.5	39.3	36.5	92.7	40.4	18.3
4PWP 60G50	5	3.7	29.2	74.2	15.9	7.2	26.9	68.4	56.1	142.6	74.5	33.7							24.2	61.4	53.4	135.6	66.7	30.2
4PWP 60G75	7.5	5.5	43.0	109.2	22.3	10.1													26.9	68.4	69.9	177.6	81.1	36.7
4PWP 80G30	3	2.2	18.6	47.2	9.7	4.4	16.3	41.3	34.8	88.5	40.2	18.2							15.5	39.3	34.1	86.5	38.5	17.4
4PWP 80G50	5	3.7	29.3	74.3	12.4	5.6	26.9	68.4	56.2	142.7	70.9	32.1							24.2	61.4	53.4	135.7	63.2	28.6
4PWP 80G75	7.5	5.5	42.6	108.1	21.9	9.9													26.9	68.4	69.5	176.5	80.7	36.5